


# Protect Earth leakage protection iC60H RCBO 10000 A / 30 mA



IEC 61009-1,  
IEC 61009-2-2

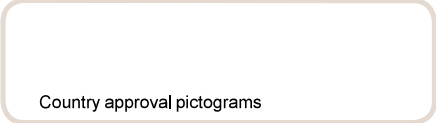

As per the above standards:

- The single-phase iC60H RCBO's self-contained residual current device carries out complete protection of final circuits:
  - protection against short-circuits and cable overloads
  - protection of persons against electric shock by direct contact
- The neutral is not interrupted when the device is tripped. Hence iC60H RCBO can be used on most circuits, except for the ones operating under TT or IT earthing systems.

Alternating current (AC) 50/60 Hz	
Breaking capacity (Icn) according to IEC 61009-1	
	Voltage (Ue)
Ph/N	240 V
Rating (In)	6 to 45 A
	10000 A

### Accessory

#### Padlocking device

- Used to lock the toggle in the "open" or "closed" position by 4 mm diameter padlock (not supplied).

Offer selection see page 1

Offer C

This sticker must be removed before publishing

## Catalogue numbers

iC60H RCBO 10000						
1P+N		A	Width in 9-mm modules			
<b>B curve</b>  DB465038	<b>Voltage rating (V)</b> 240	<b>Sensitivity (IΔn)</b> 30 mA	2			
				Rating (In)	6 A	A9D04806
					10 A	A9D04810
					16 A	A9D04816
					20 A	A9D04820
					25 A	A9D04825
					32 A	A9D04832
					40 A	A9D04840
					45 A	A9D04845
				<b>C curve</b>  DB465038	<b>Voltage rating (V)</b> 240	<b>Sensitivity (IΔn)</b> 30 mA
Rating (In)	6 A	A9D02806				
	10 A	A9D02810				
	16 A	A9D02816				
	20 A	A9D02820				
	25 A	A9D02825				
	32 A	A9D02832				
	40 A	A9D02840				
	45 A	A9D02845				
Operating frequency		50... 60 Hz				
Auxiliaries		Module CA907022				
Accessories		Module CA907021				